

# SMN75

68 kg Self-contained Ice Cuber



Other models in this range: SMN35 - SMN45 - SMN125

## Technical Features

- Stainless steel bodywork - scotch brite
- Air or water cooled
- Vertical pump
- Main switch (ON/OFF)
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R134a

## 24 Hour Ice Production - 10°C/10° C

Air Cooled	59 kg	No. of cubes 6555
Water Cooled	68 kg	No. of cubes 7555

## Bin Capacity

kg 30

## Warranty

**3** years warranty on components



## Voltage

230/50/1 standard version  
220-240/60/1 version available on demand

## Technology and Certifications



Certified ISO 9001:2008  
TOTAL QUALITY



MILANO OFFICE  
Sales Dept.  
Tel. +39 02 93900215  
e-mail: sales@simag.it  
Service Dept.  
Tel. +39 02 93960357  
e-mail: service@simag.it

SIMAG FAR EAST  
Singapore Office  
Tel. ++65 6738 5393  
e-mail: scotsman@scotsman.com.sg


[www.simag.it](http://www.simag.it)

# SMN75

68 kg Self-contained Ice Cuber



Other models in this range: SMN35 - SMN45 - SMN125

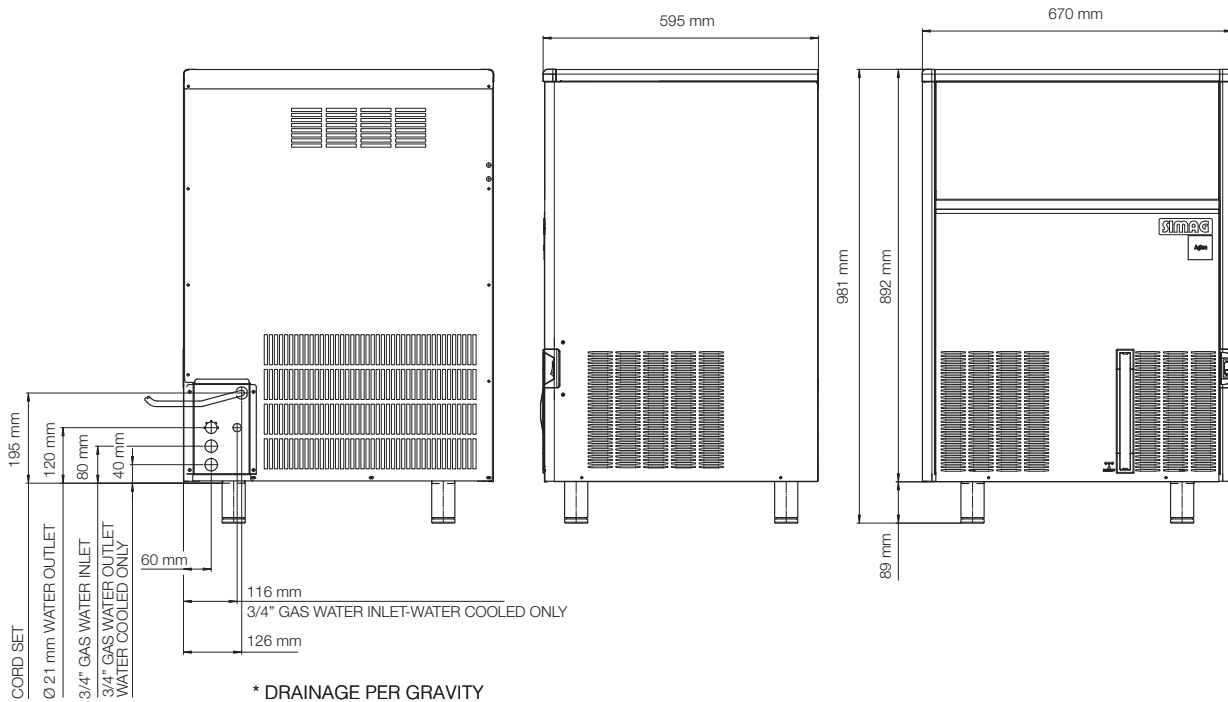

CONTROL BOARD



MAIN SWITCH  
New embedded main switch



VENTILATING GRILLE  
New ventilating grille in water cooled version



CLEANING SYSTEM  
Easy cleaning of water pump filter



TOP ANGLE  
New top plastic round corners



AIR FILTER  
New condenser air filter for air cooled version

## Operating Limits

	Minimum	Maximum
Air Temperatures	10°C	43°C
Water Temperatures	5°C	38°C
Electrical Voltage	-10%	+10%
Water Pressure	14 psi 1 bar	70 psi 5 bar

Specifications and design are subject to change without notice

	Voltage	Power Input Watt (*)	Refrigerant	Refrigerant charge kg	Fuse Amp	Water Consumption l/h (**)	Net Weight kg	Shipping Weight kg
SMN 75 AS	230/50/1	650	R134a	0,45	10	7	74	n.a.
SMN 75 AS	220-240/60/1	n.a.	R134a	n.a.	10	n.a.	74	n.a.
SMN 75 WS	230/50/1	500	R134a	0,3	10	58	74	n.a.
SMN 75 WS	220-240/60/1	n.a.	R134a	n.a.	10	n.a.	74	n.a.

(\*) Power Input: at 43°C Ambient Temperature

(\*\*) Water Consumption: at 32°C Air and 21°C Water