

# SPN1205

## 1200 kg Modular Flaker



Other models in this range: SPN125 - SPN255 - SPN405 - SPN605

### Technical Features

- Electronic control
- Stainless steel bodywork - scotch brite
- Air or water cooled
- Direct transmission
- Easily accessible components
- Low power and water consumption
- Reduced dimensions
- Continuous production
- Refrigerant R404A

### 24 Hour Ice Production - 10°C/10° C

Air Cooled      1150 kg

Water Cooled   1200 kg

### Warranty

**2** years warranty on components

### Voltage

400/50/3N standard version



### Technology and Certifications



Certified ISO 9001:2008  
TOTAL QUALITY



Residual water content 15%



MILANO OFFICE  
Sales Dept.  
Tel. +39 02 93900215  
e-mail: sales@simag.it  
Service Dept.  
Tel. +39 02 93960357  
e-mail: service@simag.it

SIMAG FAR EAST  
Singapore Office  
Tel. ++65 6738 5393  
e-mail: scotsman@scotsman.com.sg


[www.simag.it](http://www.simag.it)

# SPN1205

## 1200 kg Modular Flaker



Other models in this range: SPN125 - SPN255 - SPN405 - SPN605

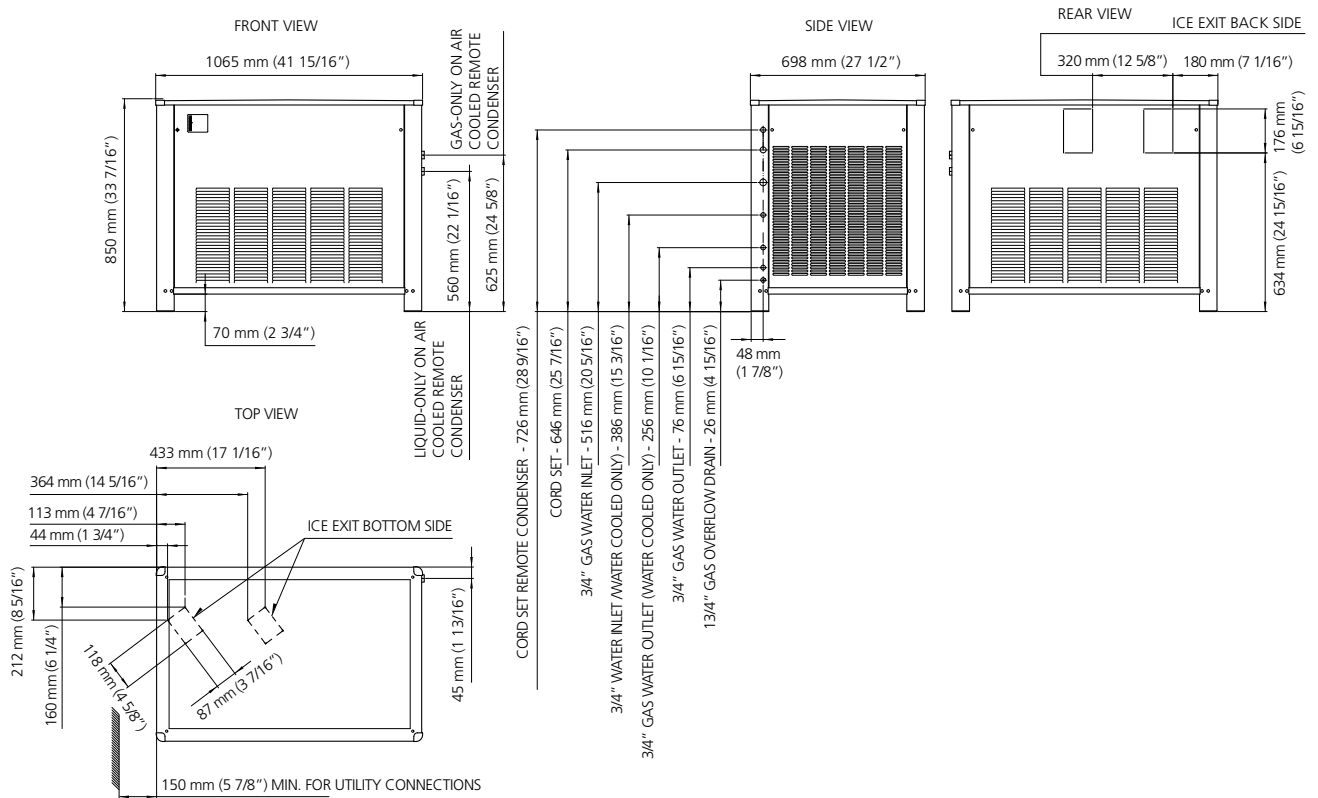

### Operating Limits

	Minimum	Maximum
Air Temperatures	10°C	43°C
Water Temperatures	5°C	38°C
Electrical Voltage	-10%	+10%
Water Pressure	14 psi 1 bar	70 psi 5 bar

Specifications and design are subject to change without notice

	Voltage	Power Input Watt (*)	Refrigerant	Refrigerant charge kg	Fuse Amp	Water Consumption l/h (**)	Net Weight kg	Shipping Weight kg
SPN 1205 AS	400/50/3N	3600	R404A	2,4	16	36	179	198
SPN 1205 WS	400/50/3N	3600	R404A	1,2	16	400	179	198

(\*) Power Input: at 43°C Ambient Temperature  
 (\*\*) Water Consumption: at 32°C Air and 21°C Water