

SPN605

600 kg Modular Flaker

SIMAG

Other models in this range: SPN125 - SPN255 - SPN405 - SPN1205

Technical Features

- Electronic control
- Stainless steel bodywork - scotch brite
- Air or water cooled
- Direct transmission
- Easily accessible components
- Low power and water consumption
- Reduced dimensions
- Continuous production
- Refrigerant R404A

24 Hour Ice Production - 10°C/10° C

Air Cooled 600 kg

Water Cooled 600 kg

Warranty

2 years warranty on components

Voltage

230/50/1 standard version

220-240/60/1 version available on demand



Technology and Certifications



Certified ISO 9001:2008
TOTAL QUALITY



Residual water content 15%



MILANO OFFICE
Sales Dept.
Tel. +39 02 93900215
e-mail: sales@simag.it
Service Dept.
Tel. +39 02 93960357
e-mail: service@simag.it

SIMAG FAR EAST
Singapore Office
Tel. ++65 6738 5393
e-mail: scotsman@scotsman.com.sg


www.simag.it

SPN605

600 kg Modular Flaker



Other models in this range: SPN125 - SPN255 - SPN405 - SPN1205

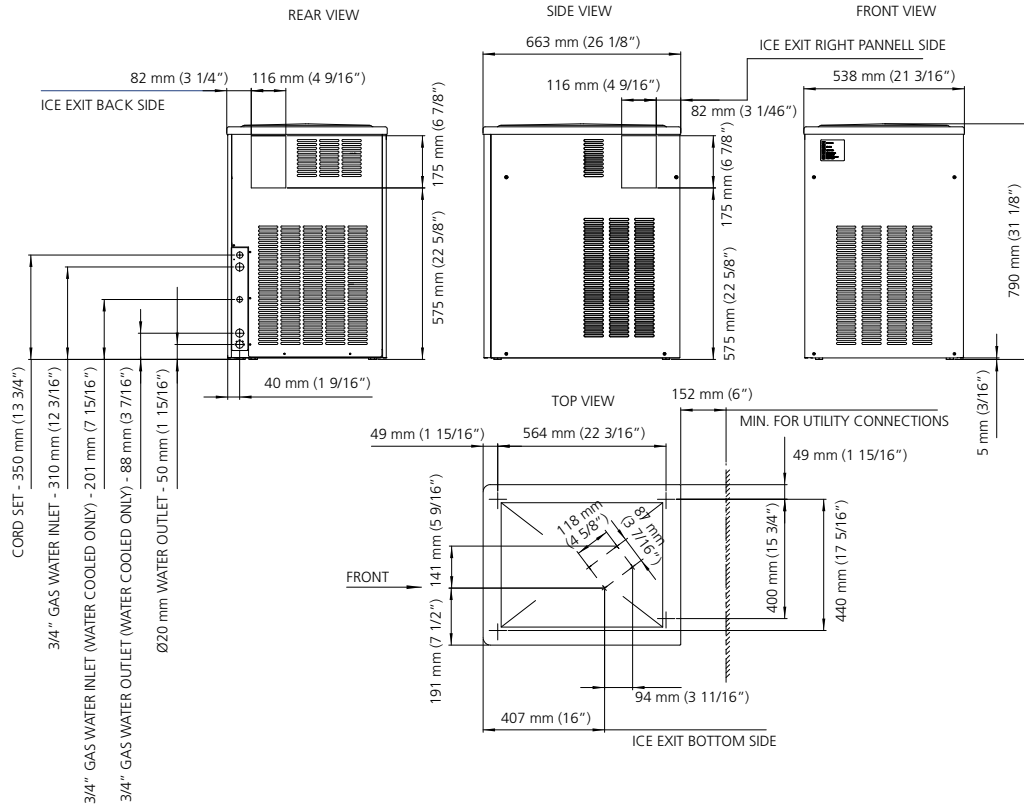

Operating Limits

	Minimum	Maximum
Air Temperatures	10°C	43°C
Water Temperatures	5°C	38°C
Electrical Voltage	-10%	+10%
Water Pressure	14 psi 1 bar	70 psi 5 bar

Specifications and design are subject to change without notice

	Voltage	Power Input Watt (*)	Refrigerant	Refrigerant charge kg	Fuse Amp	Water Consumption l/h (**)	Net Weight kg	Shipping Weight kg
SPN 605 AS	230/50/1	2000	R404A	0,99	16	18,5	94	103
SPN 605 AS	220-240/60/1	n.a.	R404A	n.a.	16	n.a.	94	103
SPN 605 WS	230/50/1	2000	R404A	0,82	16	185	94	103
SPN 605 WS	220-240/60/1	n.a.	R404A	n.a.	16	n.a.	94	103

(*) Power Input: at 43°C Ambient Temperature
 (**) Water Consumption: at 32°C Air and 21°C Water